De'sired Comfort

De'Longhi Cooling Collection 2011/2012

De'Longhi Story

In the ancient Italian city of Treviso, skilled De'Longhi designers and craftsmen have produced quality Italian products for generations.

Established by Giuseppe de'Longhi, the company has become world renowned for innovative, finely crafted products made from carefully selected European materials. Distinctive Italian styling and well-designed features are evident throughout the De'Longhi product range.

Giuseppe de'Longhi and his team delight in sharing their passion for Italian culture with discerning people around the world who enjoy fine Italian products.

De'Longhi take pride in blending continuous innovation, quality and practicality with the unmistakable statement of their award-winning Italian design.

Who can resist a good looking Italian?

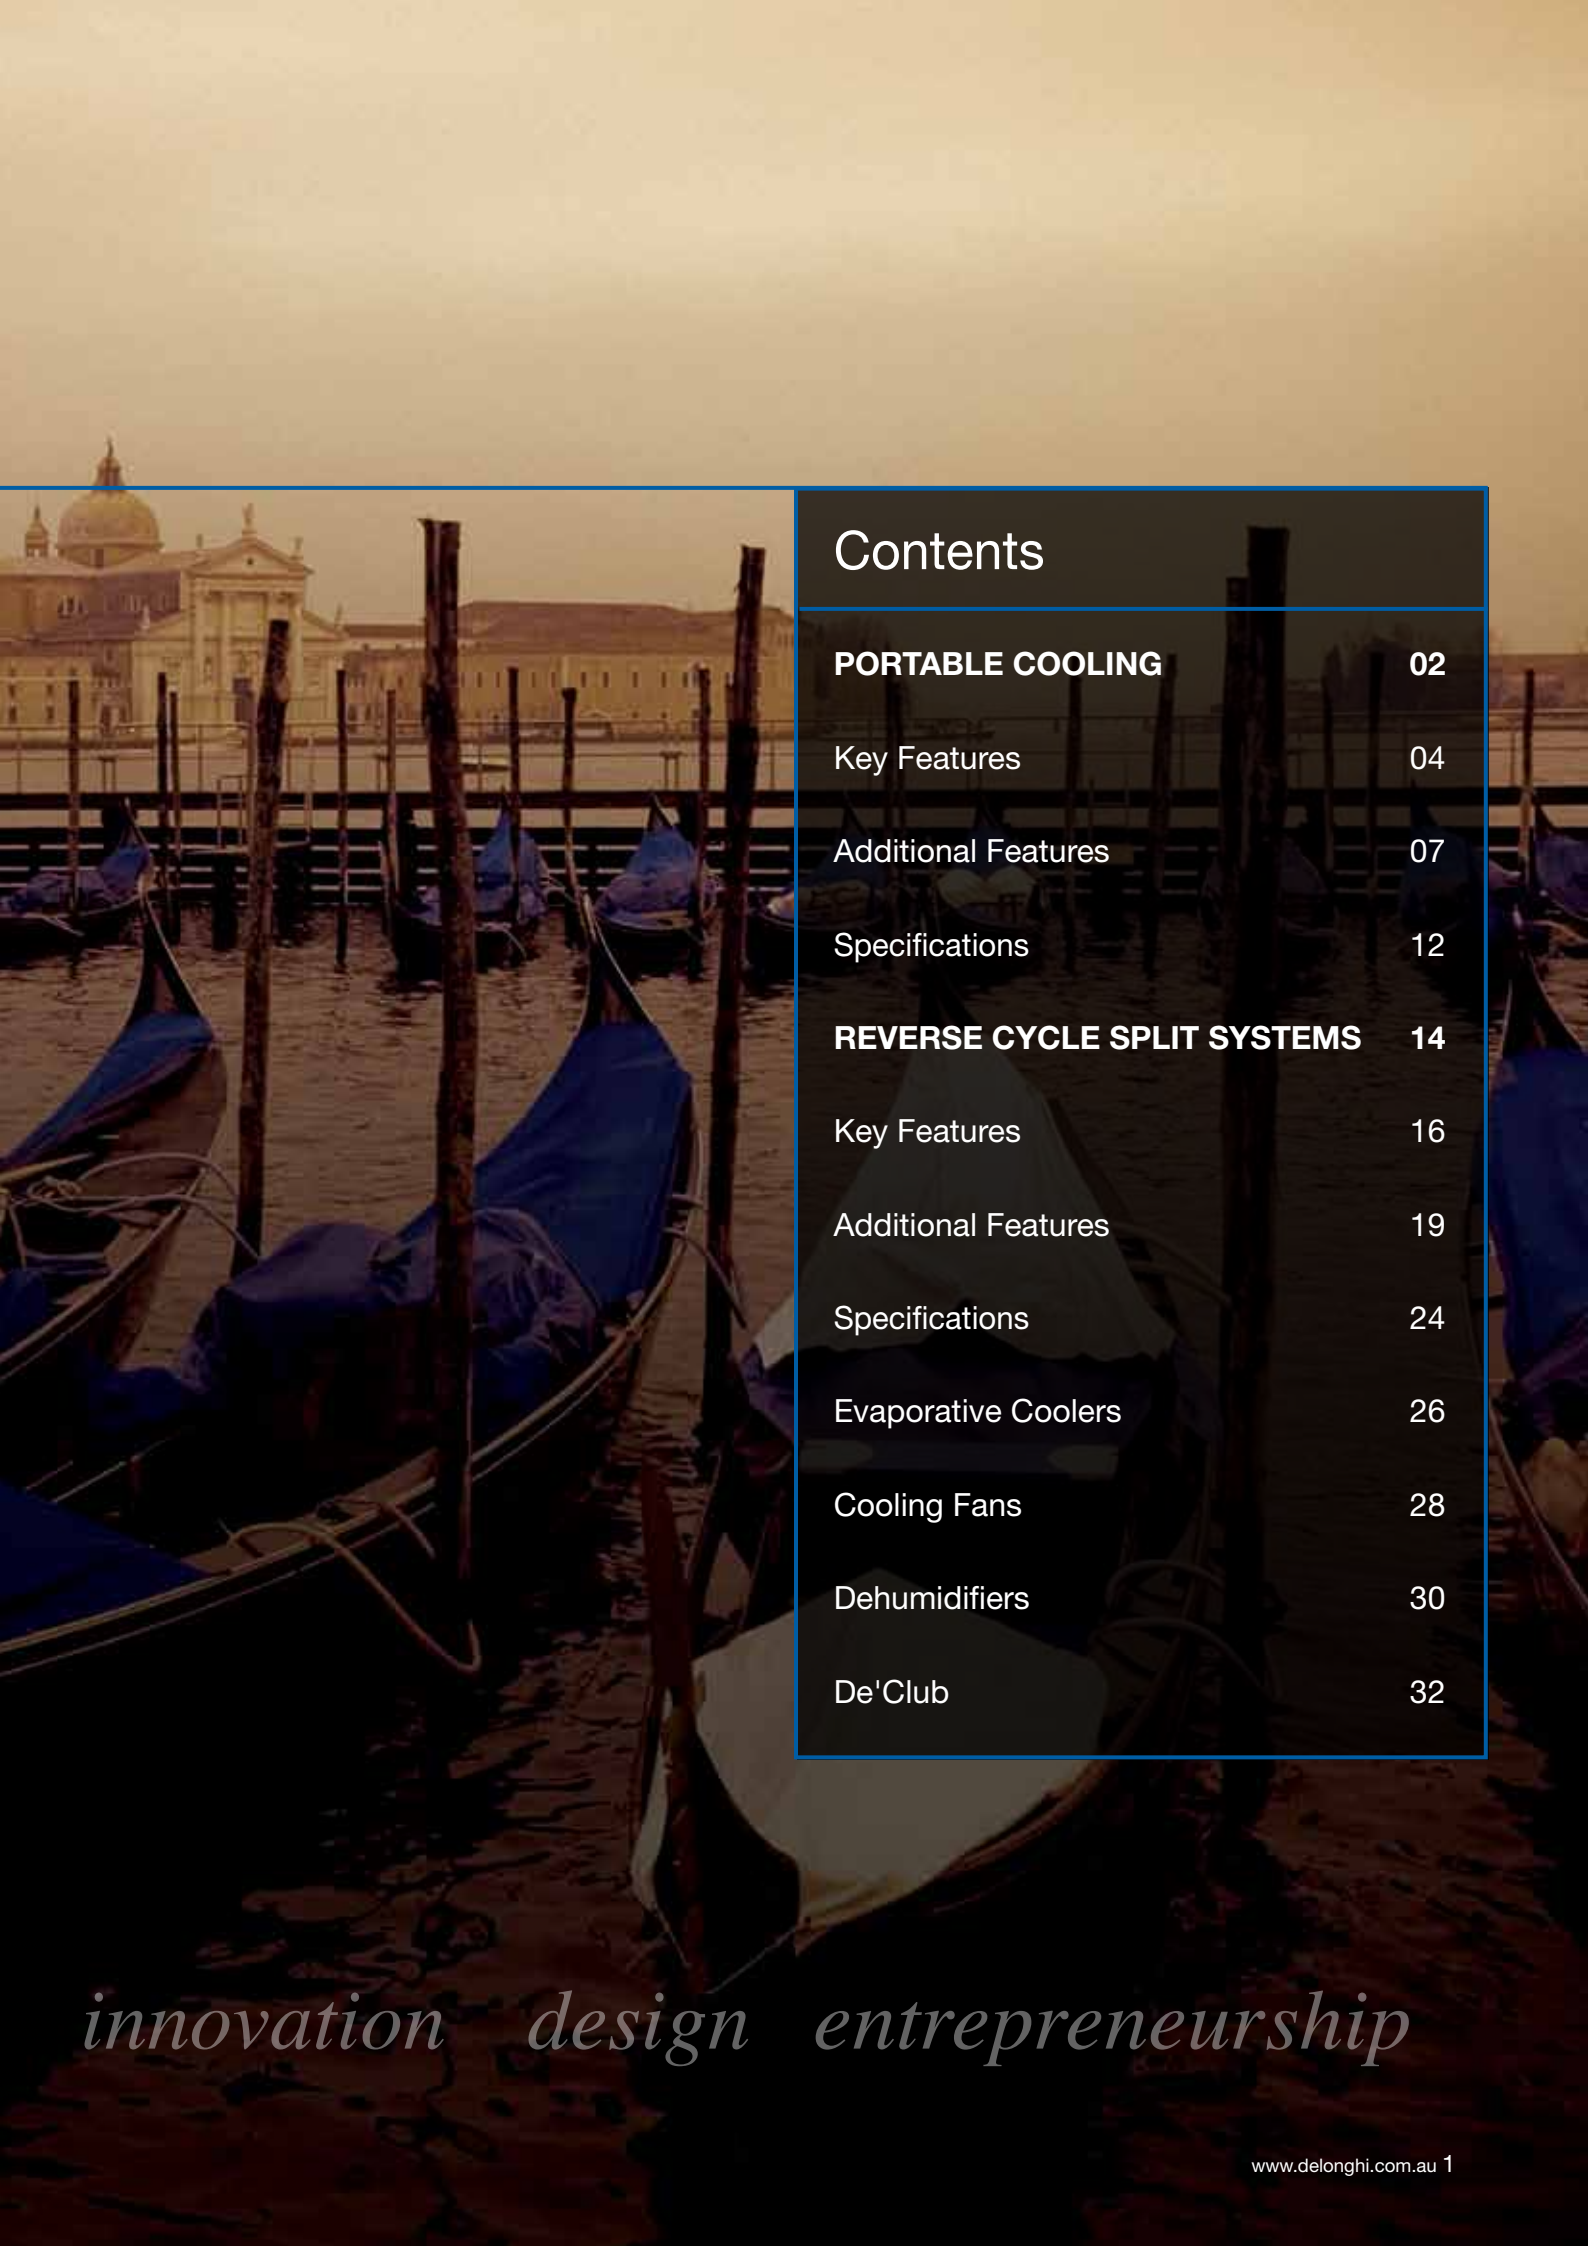

Contents

PORTABLE COOLING	**02**
Key Features	04
Additional Features	07
Specifications	12
REVERSE CYCLE SPLIT SYSTEMS	**14**
Key Features	16
Additional Features	19
Specifications	24
Evaporative Coolers	26
Cooling Fans	28
Dehumidifiers	30
De'Club	32

innovation design entrepreneurship

De'Longhi Portable Cooling

Portable Cooling Key Features

WATER TO AIR TECHNOLOGY

The exclusive Water to air technology helps to remove heat from the room through the cooling effect of water.

Hot air from the room is passed over an evaporator that is cooled by refrigerant gas. The refrigeration process is greatly improved when water is used to cool the condenser. Water stored in the water tank is delivered to a collection tray where it is pumped upward over the condenser. The condenser is then cooled by the water increasing the efficiency of the condenser, as a result the evaporator also remains at a cooler temperature which results in colder air being expelled into the room.

Due to the increased efficiency and colder air, a lower fan speed can then be selected reducing the energy consumption of the unit. Another benefit of Water to air technology is the cabinet remains at a cooler temperature and does not act as a heat source in the room.

CONSUMER BENEFITS:

- Higher cooling capacity
- Lower consumption
- Higher energy efficiency ratings
- Quieter operations due to low fan speeds
- Up to 10 hours of water to air operation

THE PROCESS IN ACTION:

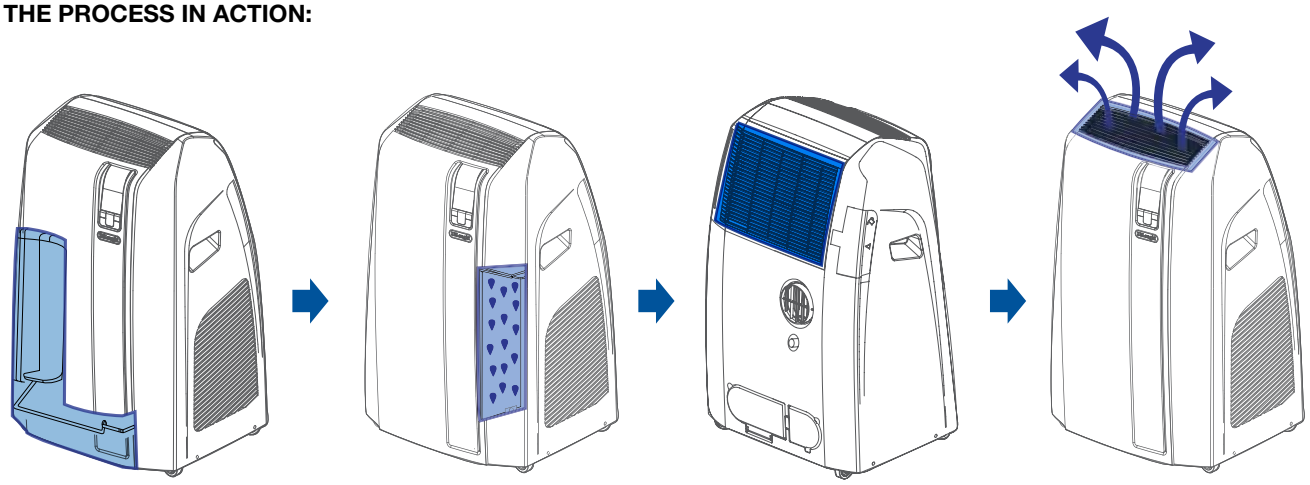

WATER TANK:
Water stored in the water tank is delivered to the collection tray

CONDENSOR:
It is then pumped over the condenser. The condenser is cooled by the water, increasing efficiency

EVAPORATOR:
The evaporator also remains at a cooler temperature

COLD AIR:
Results in colder air being expelled into the room

Portable Cooling Key Features

WATER TANKS:

Water tank for PACWE120HP and PACWE110ECO.

Water tank for PACW160HP and PACW160B.

LOW GLOBAL WARMING R290 ECO GAS

Our ECO models PACWE110ECO & PACA100ECO do not contain gases (CFC or HCFC) dangerous to the ozone layer or with a marked greenhouse effect (HCF). The air conditioners use a completely natural and non-toxic fluid: R290.

BENEFIT OF R290 ECO GAS: R290 Refrigerant provides high operational efficiency, low running costs and reduced energy consumption. It is a naturally occurring hydrocarbon which is non toxic with a low global warming potential of 3 compared to other hazardous refrigerants that have a global warming potential of 1,890, which is equivalent to 1.89 tones of CO^2 per kg of refrigerant.

MEASUREMENT OF GLOBAL WARMING POTENTIAL (GWP):

Global Warming Potential (GWP) is a measure of how much a given mass of greenhouse gas is estimated to contribute to global warming.

Portable Cooling Filtration



BIOSILVER TECHNOLOGY

An advanced filtration system that effectively removes impurities and odours from the air. It is made up of specifically designed composite filters. Firstly the air passes through a dust filter which traps larger dust particles and atmospheric dust, which are drawn in from the air in the room.

The second process in the filtering system is the silver Ion filter. This filter has an efficient antibacterial action which greatly reduces concentrations of irritant such as pollen and spores. The filter is treated with small particles of silver which are able to block the multiplication of and kill any nearby airborne bacteria. The process will also remove unpleasant odours which keeps the air fresh. The 3M filter is electrostatically charged and retains the finest dust particles. Working together the system will deliver a high filtration capacity and return fresh filtered air to the room.

THE PROCESS IN ACTION:

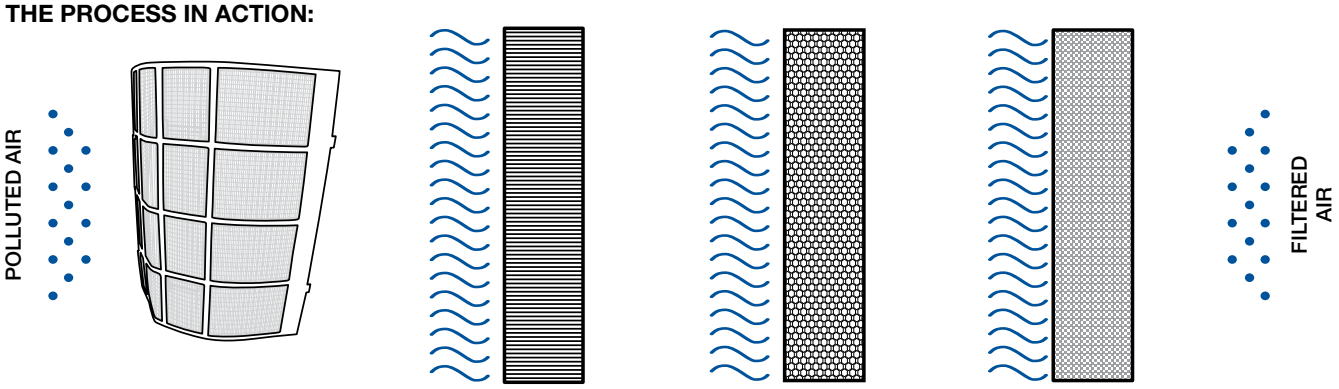
POLLUTED AIR
FILTERED AIR
IT TRAPS ATMOSPHERIC DUST
ITS ELECTROSTATIC CHARGE TRAPS SMALLER DUST PARTICLES
IT REMOVES UNPLEASANT ODOURS AND KEEPS THE AIR FRESH
IT FEATURES HIGH ANTIBACTERIAL POWER THANKS TO THE SILVER IONS

DUST FILTER:

Dust filter for PACW160HP, PACW160B and PACWE110ECO.

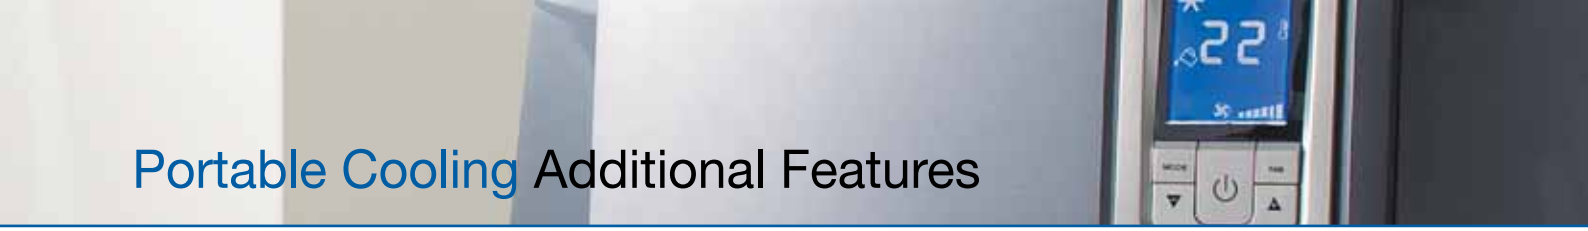

Portable Cooling Additional Features

ADDITIONAL FEATURES OF PORTABLE AIR CONDITIONERS

AIR CONDITIONING MODE
Set desired temperature and fan speed

DEHUMIDIFIER MODE
Fan speed is automatically set and up to 35L of excess moisture is removed per day

FAN MODE
Fan speed can be set and unit will operate without air conditioning or heating*

AUTO FAN
Automatically selects the most suitable fan speed

MODES
Switch between operating modes

TEMPERATURE –
Decrease set temperature

24 HOUR TIMER ON
Program the unit to turn on at any designated time

TURBO / BOOST
Increases the fan speed to reach comfort level faster

HEAT MODE
Provides effective heating* during winter months

SMART MODE
Automatically chooses mode, fan speed, and temperature

SPEEDS
Manually switch between fan speeds

SLEEP MODE
Gently changes temperature while you sleep for optimum comfort

TEMPERATURE +
Increase set temperature

24 HOUR TIMER OFF
Set 24 hour timer off

°C / °F DEGREES
Switch between degrees Celsius or Farenheit

WATER SAVE MODE
Increases the operating time when in water-to-air mode

OTHER INFORMATION

NO DRIP TECHNOLOGY Moisture is collected and redistributed over the condenser which increases the units efficiency (cooling mode only)
WINDOW KIT Allows you to vent the hot air efficiently outside the room
AIR TO AIR The unit will operate on air only when normal cooling is required or when the water tank is registering empty
WARRANTY All Portable Air Conditioners have a 2 year warranty and 5 year parts warranty on compressor

*Heating function applies to PACW160HP and PACWE120HP models only.

De’Longhi Portable Cooling

Efficiency without comparison has long been a distinguishing feature of De'Longhi air conditioners. Created with both style and functionality in mind, the 2011/2012 collection of portable air conditioners will discretely transform any living area, whatever the climate.

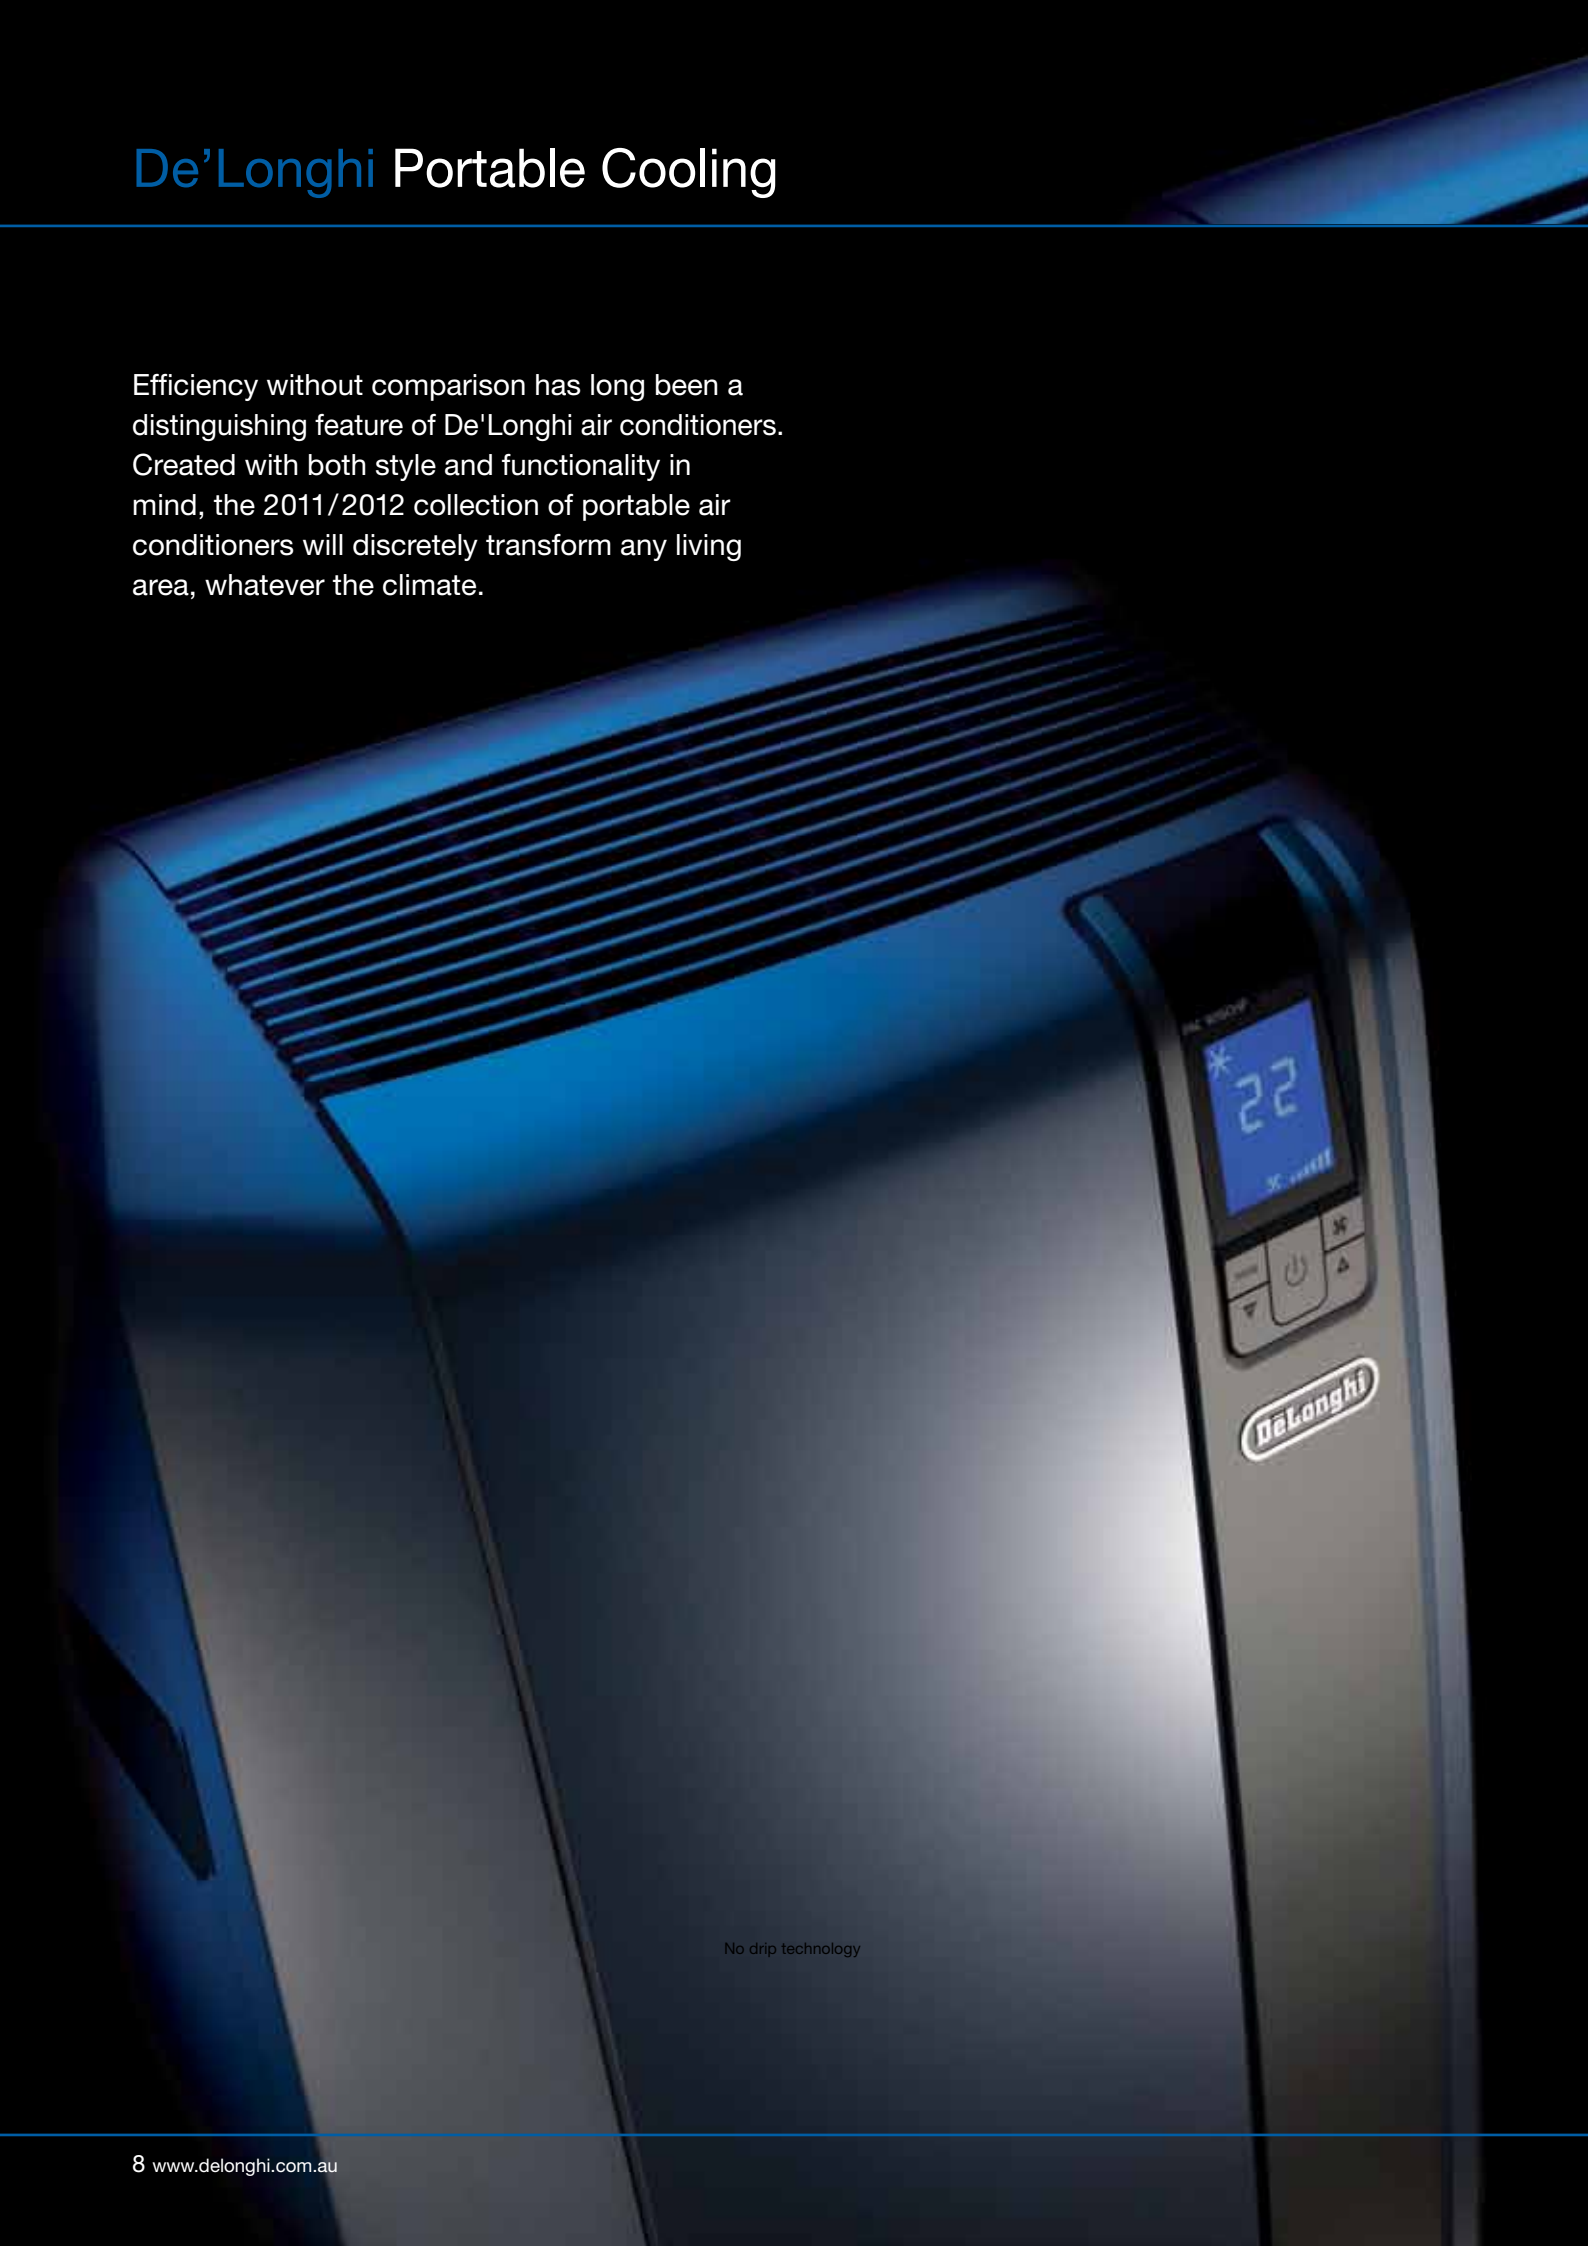

No drip technology

PACW160HP

WATER TO AIR MONO PORTABLE A/C
REVERSE CYCLE

ENERGY GUIDE

- Max. Cooling Capacity 4.400 kW
- Max. Heating Capacity 3.900 kW
- Energy Efficiency Ratio 3.52

KEY FEATURES

- Water to air technology
- Reverse cycle heat pump
- Smart mode (fully automatic operation)
- Biosilver technology (advanced filtration system)

ADDITIONAL FEATURES

- 24 hour timer
- Dehumidifier
- No drip technology
- Window kit
- Sleep mode
- Turbo power/boost
- Air to air
- Auto fan function

For a detailed description of features, refer to pages 4–7.

PACW160B
WATER TO AIR MONO PORTABLE A/C

ENERGY GUIDE
- Max. Cooling Capacity 4.400 kW
- Energy Efficiency Ratio 3.52

KEY FEATURES
- Water to air technology
- Smart mode (fully automatic operation)
- Biosilver technology (advanced filtration system)

ADDITIONAL FEATURES
- 24 hour timer
- Dehumidifier
- No drip technology
- Window kit
- Sleep mode
- Turbo power/boost
- Air to air
- Auto fan function

PACWE120HP
WATER TO AIR MONO PORTABLE A/C REVERSE CYCLE

ENERGY GUIDE
- Max. Cooling Capacity 3.520 kW
- Max. Heating Capacity 3.490 kW
- Energy Efficiency Ratio 3.46

KEY FEATURES
- Water to air technology
- Reverse cycle heat pump
- Smart mode (fully automatic operation)

ADDITIONAL FEATURES
- 24 hour timer
- Dehumidifier
- No drip technology
- Window kit
- Sleep mode
- Turbo power/boost
- Air to air
- Auto fan function

PACWE110ECO
WATER TO AIR MONO PORTABLE A/C

ENERGY GUIDE
- Max. Cooling Capacity 3.230 kW
- Energy Efficiency Ratio 3.59

KEY FEATURES
- Water to air technology
- Environmentally friendly low global warming impact
- Smart mode (fully automatic operation)
- Biosilver technology (advanced filtration system)

ADDITIONAL FEATURES
- 24 hour timer
- Dehumidifier
- No drip technology
- Window kit
- Sleep mode
- Turbo power/boost
- Air to air
- Auto fan function

PACA100ECO
AIR TO AIR MONO PORTABLE A/C

ENERGY GUIDE
- Max. Cooling Capacity 2.850 kW
- Energy Efficiency Ratio 3.16

KEY FEATURES
- Environmentally friendly low global warming impact
- Smart mode (fully automatic operation)

ADDITIONAL FEATURES
- 24 hour timer
- Dehumidifier
- No drip technology
- Window kit
- Sleep mode
- Turbo power/boost
- Air to air
- Auto fan function

For a detailed description of features, refer to pages 4–7.

De'Longhi Portable Cooling Specifications

PACW160HP

SPECIFICATION

MAX. COOLING CAPACITY kW	4.400
MAX. HEATING kW	3.900
NORMAL POWER INPUT – COOLING kW	1.250
NORMAL POWER INPUT – HEATING kW	1.300
ENERGY EFFICIENCY RATING	3.52
AIR FLOW (MAX) M^3/H	450
MOISTURE REMOVAL L/24HR*	35
REFRIGERANT	R410A
WATER TANK CAPACITY (LITRES)	14
OPERATION TIME (WITHOUT FILLING TANK) – BOOST (HOURS)	6
OPERATION TIME (WITHOUT FILLING TANK) – COOLING (HOURS)	10
INDOOR NOISE LEVEL (DbA)	45–49
MAX HOSE LENGTH (MM)	1100
HOSE DIAMETER (MM)	104
DIMENSIONS (HxWxD) MM	910x570x460
INDOOR UNIT KG	51
REMOTE CONTROL	YES
ECC LED DISPLAY	YES
WATER SAVE FUNCTION	YES
ELECTROSTATIC 3M FILTER	YES
DUST FILTER	YES
WATER DESCALING FILTER	YES
3 FAN SPEEDS	YES
CLOCK	YES
FAN ONLY FUNCTION	YES
ELECTRONIC ROOM THERMOSTAT	YES
AUTO-DIAGNOSIS	YES
CASTORS	YES

FEATURES

WATER TO AIR TECHNOLOGY	YES
R290 GAS	
BIOSILVER TECHNOLOGY	YES
SMART MODE	YES
24 HOUR TIMER	YES
DEHUMIDIFYING FUNCTION	YES
NO DRIP TECHNOLOGY	YES
WINDOW KIT INCLUDED	YES
REVERSE CYCLE	YES
SLEEP FUNCTION	YES
TURBO POWER	YES
AIR TO AIR TECHNOLOGY	YES
AUTO FAN FUNCTION	YES
WARRANTY (2 YEAR FULL WARRANTY AND 5 YEAR PARTS WARRANTY ON COMPRESSOR)	YES

*Values based on the following cooling testing conditions: 35 deg C/80% RH

PACW160B	PACWE120HP	PACWE110ECO	PACA100ECO
4.400	3.520	3.230	2.850
N/A	3.490	N/A	N/A
1.250	1.150	1.000	0.900
N/A	1.050	N/A	N/A
3.52	3.46	3.59	3.16
450	350	350	340
35	24	30	35
R410A	R410A	R290	R290
14	10	10	N/A
6	4	4	N/A
10	6	6	N/A
45–49	51–53	51–53	48–51
1100	1100	1100	1100
104	130	130	130
910x570x460	910x505x400	910x505x400	773x463x383
51	39	39	32.4
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	N/A
YES	NO	YES	NO
YES	YES	NO	YES
YES	YES	YES	N/A
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	
		YES	YES
YES		YES	
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
	YES		
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES
YES	YES	YES	YES

De’Longhi Reverse Cycle Split Systems

INVERTER TECHNOLOGY

Inverter technology has been designed to allow electronic control of the air conditioner and consequently adjust the cooling and heating capacity according to the space.

Inverter air conditioners offer maximum energy efficiency. The hermetic twin rotary compressor with BLD motor (permanent magnet) changes operating speeds based on requirements and the set temperature. Therefore, the air conditioner always operates at its optimum capacity, reaching the ideal temperature and then maintaining it over time without thermal swings: in fact, once the desired temperature has been reached, capacity is automatically adjusted to keep the temperature within +/– .05°C of the set point.

Precise electronics deliver energy savings as power consumption is limited to the effective requirements, particularly in periods of average and low thermal load (morning & evening). During hotter and more humid times (middle of the day), Inverter air conditioners are designed to rapidly reach the ideal temperature, with the cooling capacity exceeding the rated output of the appliance.

STANDARD SYSTEM VS INVERTER SYSTEM:

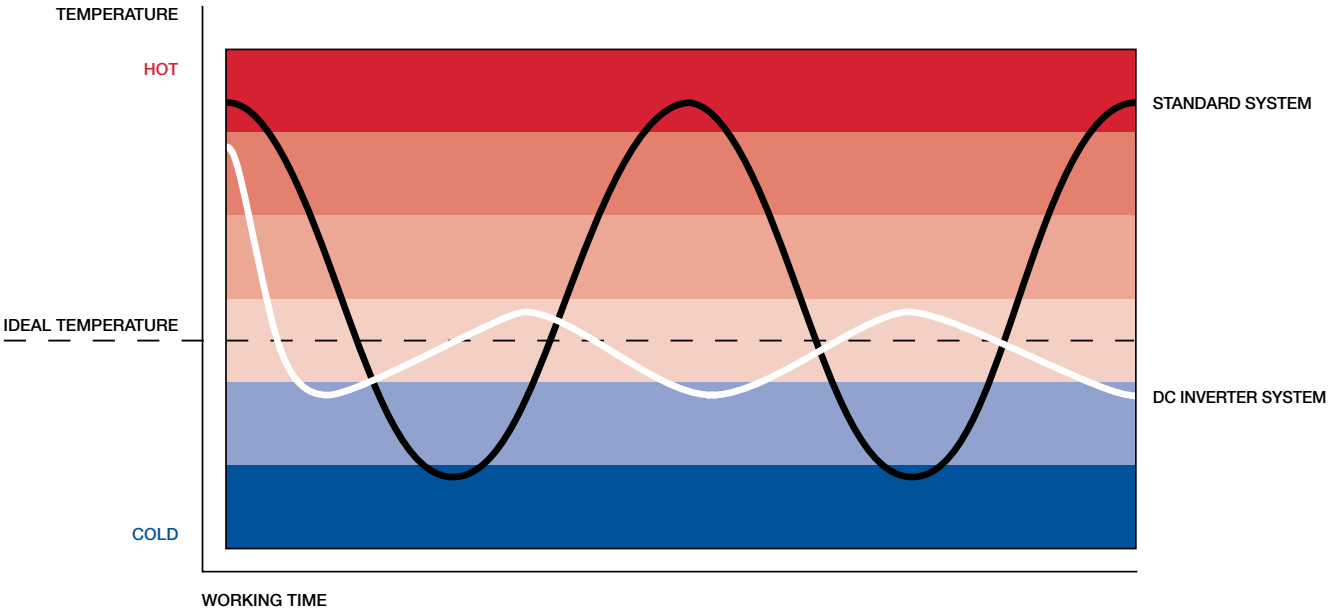

The graph shows the temperature conditions in a room air conditioned with the DC Inverter system: the regular trend of the white line shows how the ideal temperature is rapidly reached and how the comfort conditions are kept constant.

TEMPERATURE MAINTENANCE OF INVERTER SYSTEMS:

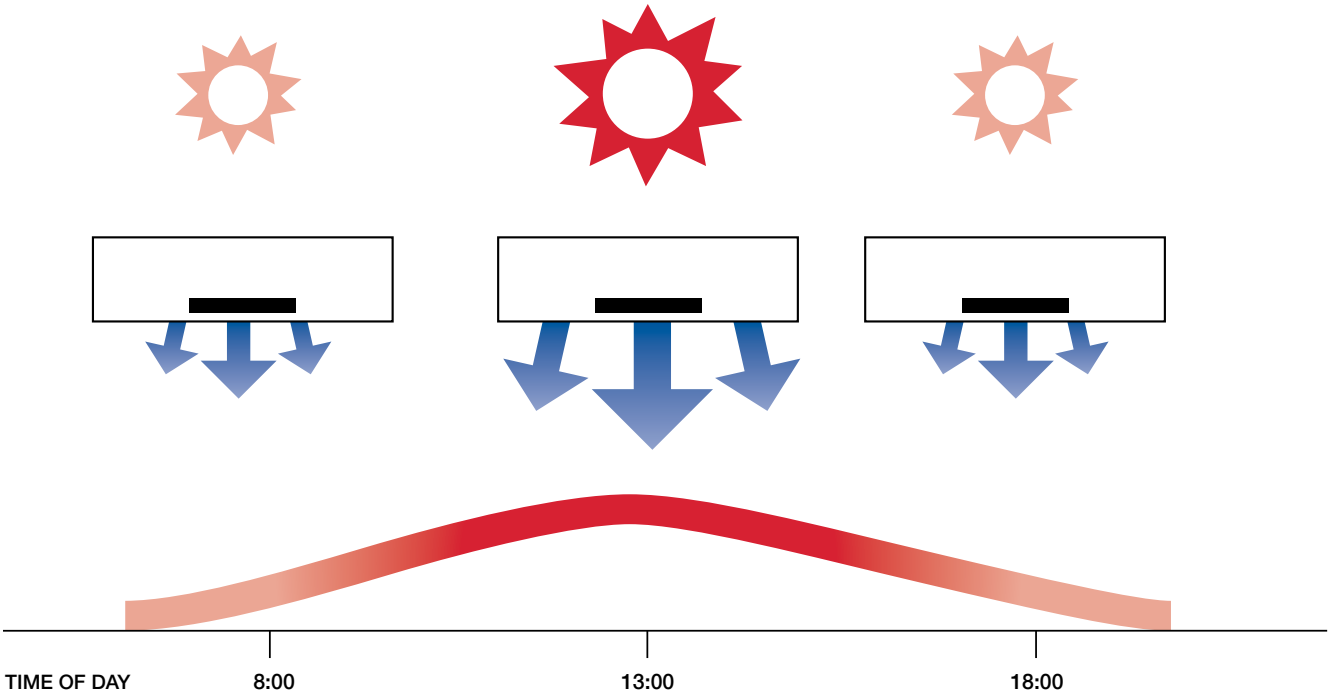

The graph clearly shows the operation of the Inverter throughout the day: while remaining on, the air conditioner operates in different modes, adapting to the outside climate conditions and consequently only consuming the energy required to maintain the desired temperature.

THE PROCESS IN ACTION:

By using DC inverter technology, De'Longhi air conditioners guarantee the best comfort at all times, keeping the room temperature and humidity constant. The precise electronics deliver real energy savings, as power consumption is limited to effective requirements, particularly in periods of average and low thermal load (morning or evening). During the hotter and more humid times (middle of the day), the inverter air conditioners are especially effective, as they are designed to rapidly reach the ideal temperature, with the cooling capacity exceeding the rated output of the appliance.



BIOSILVER TECHNOLOGY

An advanced filtration system that effectively removes impurities and odours from the air. It is made up of specifically designed composite filters. Firstly the air passes through a dust filter which traps larger dust particles and atmospheric dust, which are drawn in from the air in the room.

The second process in the filtering system is the silver Ion filter. This filter has an efficient antibacterial action which greatly reduces concentrations of irritant such as pollen and spores. The filter is treated with small particles of silver which are able to block the multiplication of and kill any nearby airborne bacteria. The process will also remove unpleasant odours which keeps the air fresh. The 3M filter is electrostatically charged and retains the finest dust particles. Working together the system will deliver a high filtration capacity and return fresh filtered air to the room.

THE PROCESS IN ACTION:

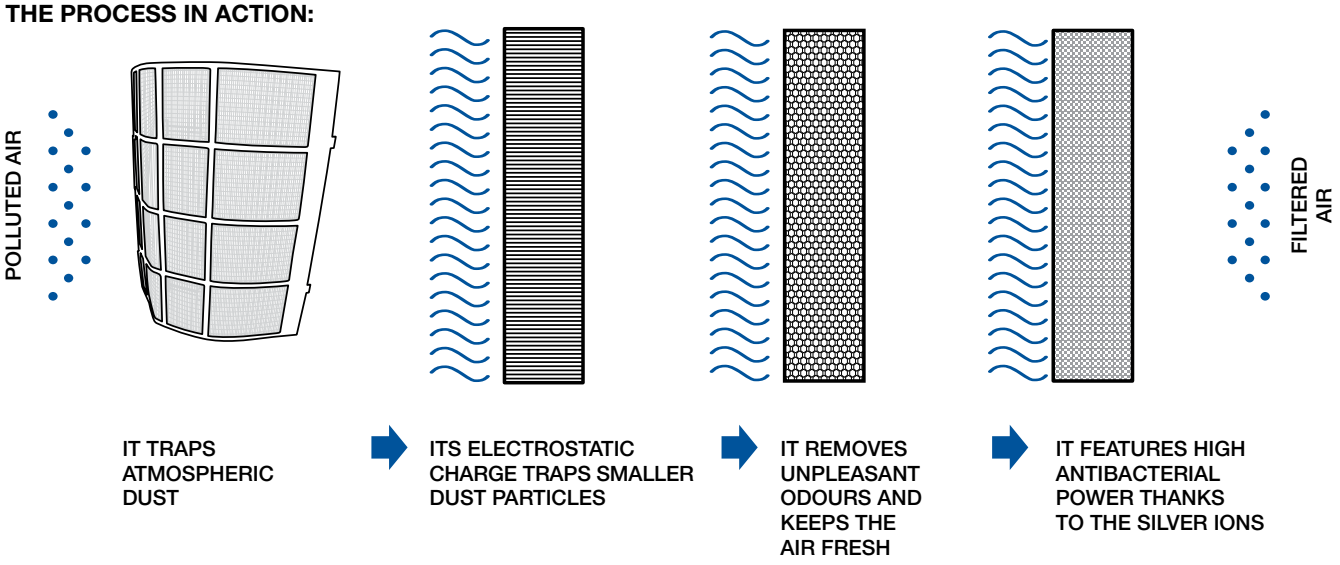
POLLUTED AIR
FILTERED AIR
IT TRAPS ATMOSPHERIC DUST
ITS ELECTROSTATIC CHARGE TRAPS SMALLER DUST PARTICLES
IT REMOVES UNPLEASANT ODOURS AND KEEPS THE AIR FRESH
IT FEATURES HIGH ANTIBACTERIAL POWER THANKS TO THE SILVER IONS

Reverse Cycle Split Systems Additional Features

ADDITIONAL FEATURES OF REVERSE CYCLE SPLIT SYSTEM AIR CONDITIONERS

AIR CONDITIONING MODE
Set desired temperature and fan speed

DEHUMIDIFIER MODE
Fan speed is automatically set and up to 72L of excess moisture is removed per day

FAN MODE
Fan speed can be set and unit will operate without air conditioning or heating

AUTO FAN
Automatically selects the most suitable fan speed

MODES
Switch between operating modes

TEMPERATURE −
Decrease set temperature

24 HOUR TIMER ON
Program the unit to turn on at any designated time

TURBO / BOOST
Increases the fan speed to reach comfort level faster

HEAT MODE
Provides effective heating during winter months

SMART MODE
Automatically chooses mode, fan speed, and temperature

SLEEP MODE
Gently changes temperature while you sleep for optimum comfort

TEMPERATURE +
Increase set temperature

24 HOUR TIMER OFF
Set 24 hour timer off

iCOMFORT
Sets room temperature at the location of the remote

OTHER INFORMATION

WARRANTY 5 years

De’Longhi Inverter Reverse Cycle Split Systems

DEINV82AUP
INVERTER
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 8.020 kW
- Max. Heating Capacity 8.700 kW
- Energy Efficiency Ratio 3.03
- Star Rating (Cooling) 1.5
- Star Rating (Heating) 1.5

DEINV63AUP
INVERTER
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 6.270 kW
- Max. Heating Capacity 6.700 kW
- Energy Efficiency Ratio 3.043
- Star Rating (Cooling) 1.5
- Star Rating (Heating) 2

DEINV52AUP
INVERTER
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 5.200 kW
- Max. Heating Capacity 5.420 kW
- Energy Efficiency Ratio 3.049
- Star Rating (Cooling) 1.5
- Star Rating (Heating) 2

DEINV35AUP
INVERTER
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 3.500 kW
- Max. Heating Capacity 4.000 kW
- Energy Efficiency Ratio 3.524
- Star Rating (Cooling) 2.5
- Star Rating (Heating) 2.5

DEINV27AUP
INVERTER
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 2.700 kW
- Max. Heating Capacity 2.900 kW
- Energy Efficiency Ratio 3.5
- Star Rating (Cooling) 2
- Star Rating (Heating) 2

FEATURES APPLICABLE TO ALL MODELS
- Inverter technology
- I-Comfort
- Biosilver technology
- Smart mode
- 24 hour timer
- Dehumidifier
- Sleep mode
- Turbo power/boost
- Auto fan function

For a detailed description of features, refer to pages 16–19.

De’Longhi Conventional Reverse Cycle Split Systems

DECON81AUP
CONVENTIONAL
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 8.100 kW
- Max. Heating Capacity 9.100 kW
- Energy Efficiency Ratio 2.97
- Star Rating (Cooling) 1
- Star Rating (Heating) 1

DECON73AUP
CONVENTIONAL
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 7.300 kW
- Max. Heating Capacity 7.770 kW
- Energy Efficiency Ratio 3.209
- Star Rating (Cooling) 1.5
- Star Rating (Heating) 2

DECON52AUP
CONVENTIONAL
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 5.200 kW
- Max. Heating Capacity 6.100 kW
- Energy Efficiency Ratio 3.04
- Star Rating (Cooling) 1.5
- Star Rating (Heating) 2

DECON35AUP
CONVENTIONAL
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 3.500 kW
- Max. Heating Capacity 3.650 kW
- Energy Efficiency Ratio 3.41
- Star Rating (Cooling) 2
- Star Rating (Heating) 2

DECON28AUP
CONVENTIONAL
REVERSE CYCLE SPLIT SYSTEM

ENERGY GUIDE
- Max. Cooling Capacity 2.800 kW
- Max. Heating Capacity 3.000 kW
- Energy Efficiency Ratio 3.41
- Star Rating (Cooling) 2
- Star Rating (Heating) 2.5

FEATURES APPLICABLE TO ALL MODELS
- I-Comfort
- Biosilver technology
- Smart mode
- 24 hour timer
- Dehumidifier
- Sleep mode
- Turbo power/boost
- Auto fan function

For a detailed description of features, refer to pages 16–19.

De'Longhi Reverse Cycle Split System Specifications

	DEINV82AUP	DEINV63AUP	DEINV52AUP	DEINV35AUP
COOLING CAPACITY KW	8.020	6.270	5.200	3.500
HEATING CAPACITY KW	8.700	6.700	5.420	4.000
NORMAL POWER INPUT – COOLING KW	2.550	1.970	1.630	990
NORMAL POWER INPUT – HEATING KW	2.800	2.000	1.600	1.100
GAS	R410A	R410A	R410A	R410A
ENERGY EFFICIENCY RATIO	3.03	3.043	3.049	3.524
STARS – COOLING	1.5	1.5	1.5	2.5
STARS – HEATING	1.5	2	2	2.5
24HR MOISTURE REMOVAL L/24H (IN DEHUMIDIFIER MODE)*	108	96	72	55
MAXIMUM PIPE LENGTH BETWEEN INTERNAL & EXTERNAL	30	30	30	20
MAXIMUM HEIGHT BETWEEN INTERNAL & EXTERNAL	10	10	10	10
LIQUID LINE SIZE (INCHES)	1/4	1/4	1/4	1/4
SUCTION LINE SIZE (INCHES)	5/8	1/2	1/2	3/8
PIPE TIGHTENING TORQUE (LIQUID)	20	20	20	20
PIPE TIGHTENING TORQUE (GAS)	65	55	55	35
QUANTITY OF REFRIGERANT PER M OF PIPE (OVER 5M) G/M	50	50	50	20
FAN SPEEDS	3	4	4	4
AIR FLOW DIRECTIONS (SWING)	5	5	5	5
HOT START INCLUDED	YES	YES	YES	YES
ECC LED DISPLAY	YES	YES	YES	YES
COVER REMOVABLE INDOOR UNIT GRILL INCLUDED	YES	YES	YES	YES
RIGHT AND LEFT DRAIN PAN PIPE CONNECTION	YES	YES	YES	YES
AUTO RESTART (ANTI-BLACKOUT) INCLUDED	YES	YES	YES	YES
AUTO DIAGNOSIS	YES	YES	YES	YES
LIGHT FUNCTION INCLUDED	YES	YES	YES	YES
INDOOR UNIT				
AIR FLOW (MAX) M³/H	1,200	900	850	590
NOISE LEVEL (MIN/MAX) DB(A)	45/47/49	34/38/43/47	35/38/42/46	29/33/37/42
DIMENSIONS (HxWxL) MM	326x253x1178	315x219x1008	298x200x940	275x180x845
NET WEIGHT KG	17.5	16	13	11
OPERATION TEMP LIMITS – MAX / MIN°C (COOLING)	32-21	32-21	32-21	32-21
OPERATION TEMP LIMITS – MAX / MIN°C (HEATING)	27-20	27-20	27-20	27-20
HEAD TYPE	Closed	Closed	Closed	Closed
OUTDOOR UNIT				
AIR FLOW (MAX) M³/H	4,000	2,900	2,700	1,800
NOISE LEVEL (MAX) DB (A)	59	54	53	53
DIMENSIONS (HXWXL) MM	790x427x980	700x424x955	700x424x955	540x320x848
NET WEIGHT KG	68	50	47	36
OPERATION TEMP LIMITS – MAX / MIN°C (COOLING)	43-21	43-21	43-21	43-21
OPERATION TEMP LIMITS – MAX / MIN°C (HEATING)	24--5	24--5	24--5	24--5
KEY FEATURES				
INVERTER TECHNOLOGY	YES	YES	YES	YES
I-COMFORT	YES	YES	YES	YES
BIOSILVER TECHNOLOGY	YES	YES	YES	YES
SMART MODE	YES	YES	YES	YES
24 HOUR TIMER	YES	YES	YES	YES
DEHUMIDIFYING FUNCTION	YES	YES	YES	YES
SLEEP FUNCTION	YES	YES	YES	YES
TURBO POWER	YES	YES	YES	YES
AUTO FAN FUNCTION	YES	YES	YES	YES
5 YEAR WARRANTY	YES	YES	YES	YES

*Values based on the following cooling testing conditions: 35 deg C/80% RH

DEINV27AUP	DECON81AUP	DECON73AUP	DECON52AUP	DECON35AUP	DECON28AUP
2.700	8.100	7.300	5.200	3.500	2.800
2.900	9.100	7.700	6.100	3.650	3.000
740	2.630	2.250	1.680	1.000	800
830	2.950	2.300	1.850	1.050	800
R410A	R410A	R410A	R410A	R410A	R410A
3.5	2.97	3.209	3.04	3.41	3.41
2	1	1.5	1.5	2	2
2	1	2	2	2	2.5
43	108	98	72	55	43
20	30	30	25	20	15
10	10	10	10	10	10
1/4	1/4	1/4	1/4	1/4	1/4
3/8	5/8	5/8	1/2	1/2	3/8
20	20	20	20	20	20
35	65	65	55	55	35
20	50	50	30	20	20
4	3	3	4	4	4
5	5	5	5	5	5
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
500	1,200	1,200	850	630	600
23/28/32/38	45/48/51	46/48/50	35/39/43/47	25/30/35/40	25/30/34/40
265x170x790	326x253x1178	326x253x1178	298x200x940	275x180x845	275x180x845
10	17.5	17.5	13	10	10
32-21	32-21	32-21	32-21	32-21	32-21
27-20	27-20	27-20	27-20	27-20	27-20
Closed	Closed	Closed	Closed	Closed	Closed
1,600	4,000	4.000	2.900	2.000	1.800
48	59	56	55	52	49
540x320x776	790x427x980	790x427x980	680x378x913	540x320x848	540x320x848
36	68	72	46	41	40
43-21	43-21	43-21	43-21	43-21	43-21
24--5	24--5	24--5	24--5	24--5	24--5
YES					
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES

De’Longhi Evaporative Coolers

De'Longhi Evaporative coolers are best utilised in dry conditions. The combination of water and air will bring the temperature down without drying out the surrounding air. Three fan speeds with an oscillating function helps to distribute the cool air.

EV200
EVAPORATIVE COOLER

FEATURES

- Economical and natural cooling
- Electronic touch controls with remote control
- 3 speed fan
- 8 hour countdown timer (½ hour increments)
- Easy access to water and ice tank
- Water pump
- Water level indicator
- Vertical swing louvers
- Ion function
- 15 Litre water tank
- Remote control
- 1 year warranty

EV100
EVAPORATIVE COOLER

FEATURES

- Economical and natural cooling
- Electronic touch controls with remote control
- 3 speed fan
- 7½ hour countdown timer (½ hour increments)
- Easy access to water and ice tank
- Water pump
- Water level indicator
- Vertical swing louvers
- Ion function
- 2 ice blocks included
- 7 Litre water tank
- Remote control
- 1 year warranty

De’Longhi Cooling Fans

De'Longhi Cooling Fans have a contemporary style which provide cool distribution of air. They are a stand out fixture that will complement any decor.

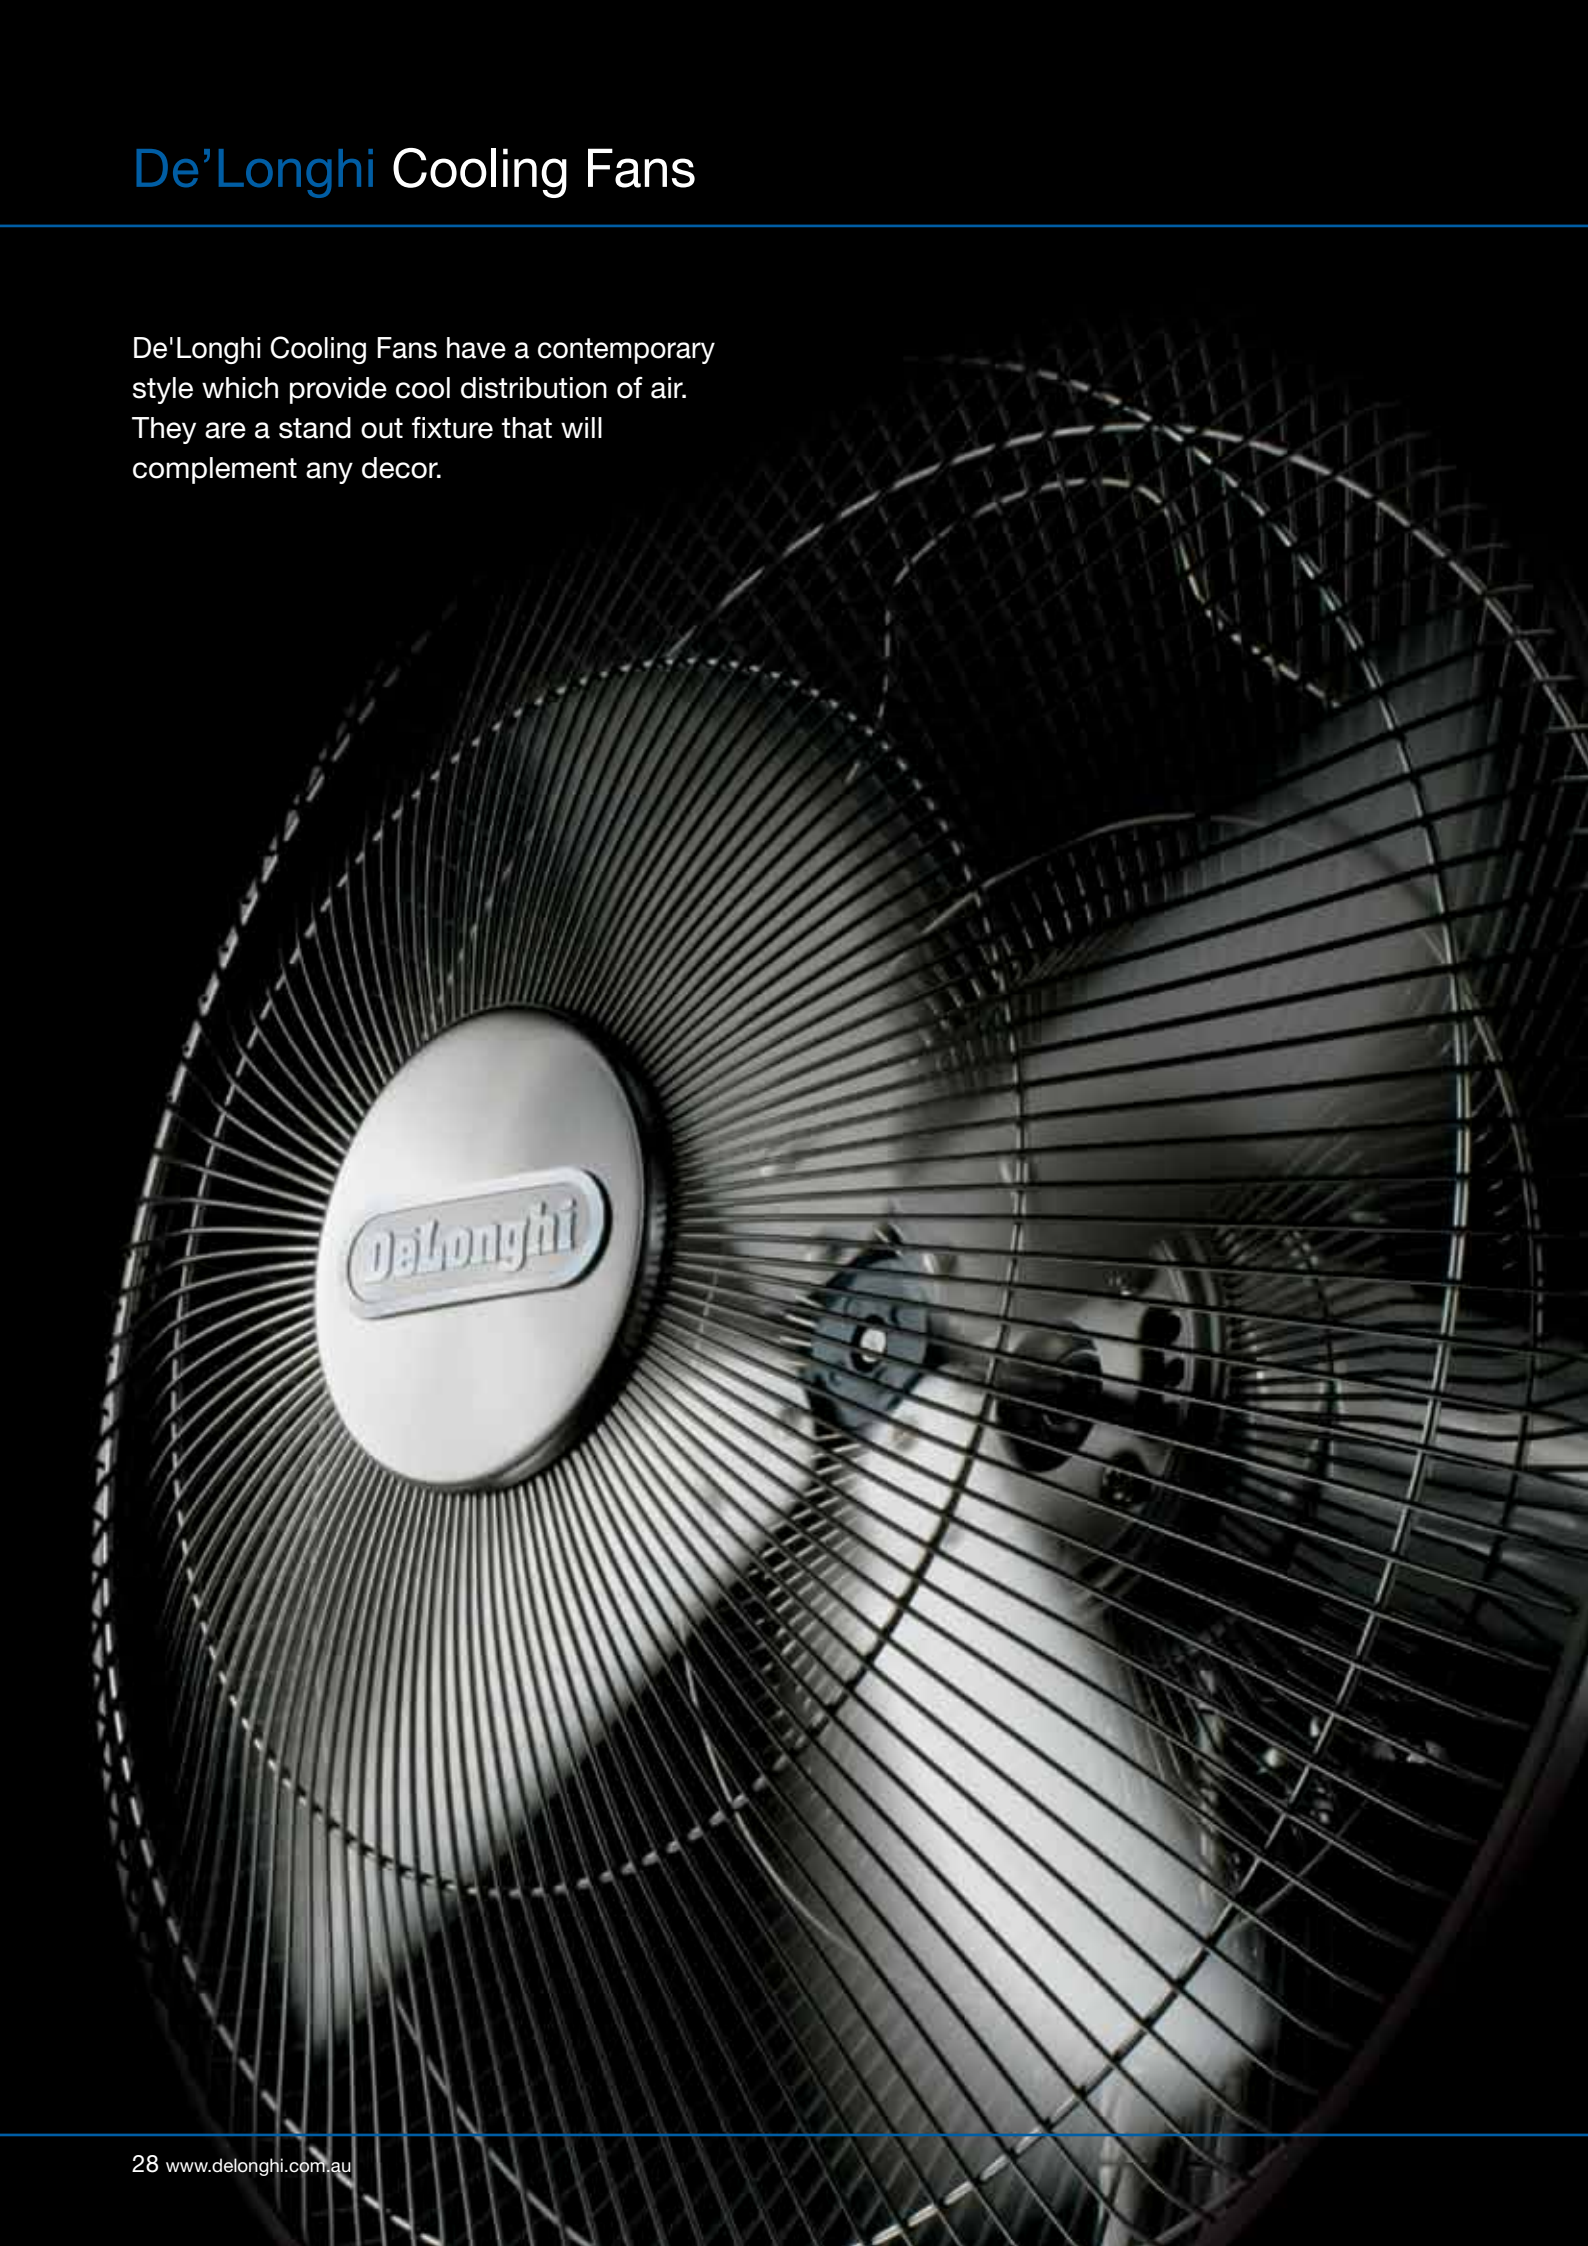

VLT3000
COOLING FAN

FEATURES
- Brushed metal finish
- 40cm pedestal fan
- Satin base, support, blades and grill
- Rubber surface protectors
- 3 fan speeds
- Horizontal oscillation functions
- Adjustable vertical position
- 1 year warranty

VLT2000
COOLING FAN

FEATURES
- Brushed metal finish
- 40cm table top fan
- Satin base, support, blades and grill
- Rubber surface protectors
- 3 fan speeds
- Horizontal oscillation functions
- Adjustable vertical position
- 1 year warranty

VLT1000
COOLING FAN

FEATURES
- Brushed metal finish
- 35cm table top fan
- Satin base, support, blades and grill
- Rubber surface protectors
- 3 fan speeds
- Horizontal oscillation functions
- Adjustable vertical position
- 1 year warranty

De'Longhi Dehumidifiers

De'Longhi dehumidifiers solve the problem of humidity and dampness in the home. By reducing humidity, you protect your furniture and clothes from mould and mildew; your windows from condensation; and your home from unpleasant odours. Dehumidifiers remove excess humidity from the air to create a drier, healthier environment.

CF08E
DEHUMIDIFIER

FEATURES

- Electronic control panel for preset selections
- Collects up to 20 Litres moisture a day
- 3 speed fan, with quiet setting
- Large capacity tank: 6 Litres
- Compact design and lightweight
- Quiet operation, with rotary compressor
- Draining system: To tank or continuously
- Tank control system: Auto shut off when full
- Cleanable air filter removes dust and pollen
- Operating range: 2°C – 38°C
- Tank full indicator
- Handle and castors for easy movement
- 2 year warranty

CFO5M / CFO8M
DEHUMIDIFIER

FEATURES

- Collects up to 20 Litres moisture a day (CFO8M)
- Collects up to 12 Litres moisture a day (CFO5M)
- 3 speed fan, with quiet setting
- Manual control
- Large capacity tank: 6 Litres
- Compact design and lightweight
- Quiet operation, with rotary compressor
- Draining system: To tank or continuously
- Tank control system: Auto shut off when full
- Cleanable air filter removes dust and pollen
- Operating range: 2°C – 38°C
- Tank full indicator
- Handle and castors for easy movement
- 2 year warranty

AN INVITATION TO JOIN THE De'Club!

De'Longhi De'Club members enjoy a variety of special offers and benefits all year round. Exclusive offers to members include special deals on De'Longhi products and accessories. Your bi-monthly De'Club newsletter will keep you posted on new products, competitions and more.

Joining is easy and free, just register at:

www.delonghi.com.au

Welcome to the De'Club!

Distributed by De'Longhi Australia Pty Ltd
ABN 49 104 012 857
P.O. BOX 4540
CASULA MALL NSW 2170

For Customer Care and Sales Information contact:

Phone: 1800 126 659
Fax: 1800 007 289

Optional accessories can be purchased either directly from the point of purchase or by using the online accessory shop at: **www.delonghi.com.au**

To enquire about the warranty information on the products featured in this brochure, please visit: **www.delonghi.com.au**

Scan the QR code to view the Cooling Range details online

DISCLAIMERS: Not all models available at time of print. Innovations and features depicted in this brochure are on specific models only. The product dimensions and specifications in this brochure apply to the specific products and models at the time of issue. These dimensions and specifications may change at any time. The photographs in this brochure are for illustrative purposes only.